



CSS/CDS, KSS/KDS accessories

MGNS, Side panels



Description: Stainless steel side panels. With an extruded polyurethane gasket.

Material: 1.5 mm 304 S15 pre-grained stainless steel.

Includes: Mounting material

Pack. quantity: 2 panels

H	D	Part No.
1800	500	MGNS1805
2000	600	MGNS2006

MSNS, Plinths



Description: Allowing cabling without any restrictions and in accordance with the VDE 0113 standard. The plinth consists of four corner pieces with removable plates. Available 100 mm and 200 mm high with removable side plates.

Material: Corners 3 mm, and panels 1.5 mm 304 S15 pre-grained stainless steel.

Surface characteristics: 240s (0.5 micron), (Other grades available upon request).

Delivery: 1 plinth with mounting material.

H	W	D	Part No.	
100	600	400	MSNS1064	
		500	MSNS1065	
	800	600	MSNS1066	
		400	MSNS1084	
		500	MSNS1085	
		600	MSNS1086	
200	1000	400	MSNS1104	
		500	MSNS1105	
	1200	600	MSNS1106	
		400	MSNS1124	
		500	MSNS1125	
		600	MSNS1126	
200	600	400	MSNS2064	
		500	MSNS2065	
		600	MSNS2066	
	800	400	MSNS2084	
		500	MSNS2085	
		600	MSNS2086	
	1000	400	400	MSNS2104
			500	MSNS2105
		1200	600	MSNS2106
			400	MSNS2124
			500	MSNS2125
			600	MSNS2126



CSS/CDS, KSS/KDS accessories

MP, Mounting plates



Description: Standard mounting plate. Fixing bracket kit MPA 06 to be ordered separately. Can also be mounted in the side of an enclosure by using bracket kit MPS or slide in from the side by using the sliding profile MTS. For heavy loads in vibrating environments use mounting plate reinforcement profile MPR and MPE or MPEF brackets.

Maximum load: 6000N

Material: 3 mm galvanised steel.

Note: 500 mm deep mounting plates for side mounting available on request.

Pack. quantity: 1 piece

H	W	h	w	Part No.
1600	600	1494	494	MP1606
	800	1494	694	MP1608
	1000	1494	894	MP1610
1800	1200	1494	1094	MP1612
	500	1694	394	MP1805
	600	1694	494	MP1806
	800	1694	694	MP1808
2000	1000	1694	894	MP1810
	1200	1694	1094	MP1812
	500	1894	394	MP2005
	600	1894	494	MP2006
2200	800	1894	694	MP2008
	1000	1894	894	MP2010
	1200	1894	1094	MP2012
	600	2094	494	MP2206
1000	800	2094	694	MP2208
	1000	2094	894	MP2210
	1200	2094	1094	MP2212

Use MPA (MF), UMB (KSS, CSS) for mounting the MP inside the enclosure.

UMB, Mounting plate brackets



Description: To mount an extra mounting plate or UPN profiles. When an enclosure without mounting plate is ordered, a set of brackets is still provided.


Material: 3 mm zinc plated steel.

Delivery: Complete with mounting material.

Pack. quantity: 2 top and 2 bottom brackets.

Part No.
UMB8

MPF, Filler plates

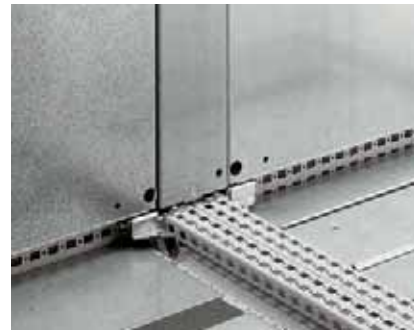


Description: Covers the space between pairs of adjacent mounting plates to provide a continuous working surface, when two enclosures are mounted together.

Material: 2 mm zinc plated steel.

Pack. quantity: 1 plate with mounting material.

H	Part No.
1800	MPF1800
2000	MPF2000
2200	MPF2200

PMPZ, Partial height mounting plate

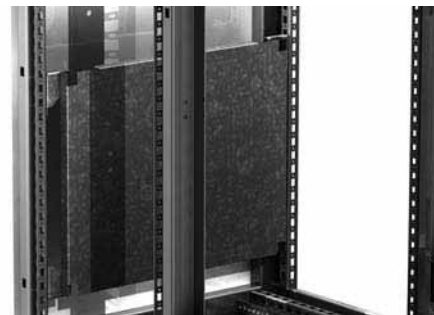

Description: To be mounted directly on to the enclosure frame or on click-in profiles (SSP). Can be located in any position in height and depth that the 25 mm, hole pattern will allow. Appropriate sizes can also be used in the sides of the enclosure by using appropriate depth profiles.

Material: 3 mm galvanised steel.

Pack. quantity: 1 plate

W	h	w	Part No.
600	150	500	PMPZ1506
	250	500	PMPZ2506
	200	500	PMPZ0206
	300	500	PMPZ0306
	400	500	PMPZ0406
	600	500	PMPZ0606
	800	500	PMPZ0806
	1000	500	PMPZ1006
800	1200	500	PMPZ1206
	200	700	PMPZ0208
	300	700	PMPZ0308
	400	700	PMPZ0408
1000	600	700	PMPZ0608
	800	700	PMPZ0808
	1000	700	PMPZ1008
	1200	700	PMPZ1208
	200	900	PMPZ0210
	300	900	PMPZ0310
	400	900	PMPZ0410

CSS/CDS, KSS/KDS accessories

LE, Lifting eye bolts




Description: M12 thread. Mounts directly to the frame corner pieces of the enclosure. Complies with DIN 580 lifting requirements.

Maximum load: 3400N per lifting eye with max angle of 45°. Please follow Eldon lifting instructions.

Pack. quantity: 2 pieces

Description	Part No.
Lifting eye zinc plated	LE9301
Stainless steel lifting eye	LE9301SS

LD, Lifting device




Description: For optimal weight distribution when lifting bayed enclosures.

Pack. quantity: 4 pieces with mounting material.

Part No.
LD12

MGTZ, Separation plate




Description: To be fixed with Combining kit MJNC 8.

Material: 1.5 mm galvanised steel.

Pack. quantity: 1 piece

H	D	Part No.
1800	500	MGTZ1805
2000	600	MGTZ2006

MJNC, Baying kit




Description: For baying enclosures. These brackets are used in combination with separation plates. 6 kits with mounting material.

Pack. quantity: 6 kits with mounting material.

Part No.
MJNC8

MJN, Baying brackets



Description: For baying enclosures. These rigid brackets also provide a good reinforcement of the enclosure assembly.

Material: 3 mm zinc plated steel.

Pack. quantity: 4 brackets with mounting material.

Part No.
MJN8

MJNS, Combining screws



Description: Set of M10 screws, nuts and washers for easy baying of enclosures by using the holes in the side of the frame. This method of combining the enclosures has the advantage of realising a direct earthing connection between the enclosure frames and overall to provide a very strong suiting of the enclosures.

Pack. quantity: 8 screws. 8 nuts and 16 earthing washers.

Part No.
MJNS10

CNM, Cage nuts



Description: Cage nuts M 6 designed for universal use on the enclosure frame profiles and the profile system.


Pack. quantity: 50 pieces

Thread	Description	Part No.
M6	for 1,6 mm	CNM615
M8	for 1,6 mm	CNM815



CSS/CDS, KSS/KDS accessories

STS, Sheet metal screws




Description: For universal fixing in the DIN pattern of round holes on the system profiles and relevant accessories.

Dimension: 5.5 x 13.

Pack. quantity: 50 pieces

Part No.
STS50

STSM, Self tapping screws, metric thread



Description: To be used in the DIN pattern of round holes on the enclosure frame, system profiles and relevant accessories. Provide a standard M5 thread. Dimension: 5 x 12.

Dimension: 5 x 12.

Pack. quantity: 50 pieces

Thread	Part No.
M5	STSM50

KMB, Vertical mounting profiles



Description: For stand-alone enclosures KSS/KDS. Vertical mounting profiles with 25mm, hole pattern. When fitted into the frame they allow the use of all relevant accessories.

Material: 2 mm zinc plated steel.

Pack. quantity: 2 profiles including fixing material.

H	Part No.
1600	KMB1600
1800	KMB1800
2000	KMB2000

SSP, Click-in profile



Description: The click-in system promotes a quick and effective assembly of enclosure framework with 25 mm DIN hole pattern. To be used when installing universal mounting or partial height mounting plates etc. Can be secured by the use of self-tapping screws.

Material: 1.5 mm zinc plated steel.

Pack. quantity: 4 profiles

W	D	Part No.
	400	SSP250
	500	SSP350
400		SSP375
	600	SSP450
500		SSP475
600		SSP575
	800	SSP650
800		SSP775

PFB, Fixing brackets for flexible profile system



Description: For fixing PSF profiles to the enclosure frame or to one another.

Material: 2 mm zinc plated steel.

Pack. quantity: 8 brackets

W	Part No.
25	PFB01
50	PFB02
75	PFB03

CSS/CDS, KSS/KDS accessories

PSF25, Flexible profile system



Description: PSF flexible profile system W= 25. Single 25 mm, hole pattern according to DIN standards.

Pack. quantity: 4 pieces

H	W	D	Profile length	Part No.
-	-	400	219	PSF25-225
		500	319	PSF25-325
		600	419	PSF25-425
	600	-	544	PSF25-550
	800	-	744	PSF25-750
1600	-	-	1444	PSF25-1450
1800	-	-	1644	PSF25-1650
2000	-	-	1844	PSF25-1850

PSF50, Flexible profile system

Description: PSF flexible profile system W= 50. Single 25 mm, hole pattern according to DIN standards.

Pack. quantity: 4 pieces

H	W	D	Profile length	Part No.
-	-	400	219	PSF50-225
		500	319	PSF50-325
		600	419	PSF50-425
	600	-	544	PSF50-550
	800	-	744	PSF50-750
1600	-	-	1444	PSF50-1450
1800	-	-	1644	PSF50-1650
2000	-	-	1844	PSF50-1850

PSF75, Flexible profile system

Description: PSF flexible profile system W= 75. Single 25 mm, hole pattern according to DIN standards.

Pack. quantity: 4 pieces

H	W	D	Profile length	Part No.
-	-	400	219	PSF75-225
		500	319	PSF75-325
		600	419	PSF75-425
	600	-	544	PSF75-550
	800	-	744	PSF75-750
1600	-	-	1444	PSF75-1450
1800	-	-	1644	PSF75-1650
2000	-	-	1844	PSF75-1850

CBN, Carrier bars



Description: Used for heavy units such as transformers. Fitted to the bottom of the enclosure.


Material: 3 mm steel, zinc plated.

Includes: Complete with mounting material.

Pack. quantity: 2 bars

W	Max. loading	Part No.
600	140	CBN600
800	100	CBN800
1000	80	CBN1000

MBES, Split bottom plate

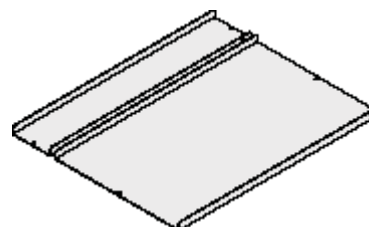

Material: Stainless steel


Description: Fitted in place of the standard one piece bottom plate, allows direct cable entry. To achieve perfect sealing around the cables use the gasket kit MBA 401.

Pack. quantity: 1 kit of two part bottom plate.

W	D	Part No.
600	400	MBES064
	500	MBES065
	600	MBES066
800	400	MBES084
	500	MBES085
	600	MBES086
1000	400	MBES104
	500	MBES105
	600	MBES106

For enclosures 1200 mm & 1600 mm wide use 2 x 600 & 2 x 800 wide bottom plates.

MST, Door stop



Description: To be mounted directly on the door frame. For K and C series floorstanding and MPC(S) and MPG(S) consoles.

Pack. quantity: 1 piece with mounting material.

Part No.
MST401



CSS/CDS, KSS/KDS accessories

BG, Cable entry foam and bottom plate gasket



Description: The bottom of the enclosure is sealed by the use of an adhesive gasket applied on to the frame around the bottom openings. The cables are sealed by the addition of adhesive foam placed between the bottom plates. The elasticity and the size of this foam ensure a tight seal around most cables.

Pack. quantity: 1.6 m adhesive foam (30 x 25 mm) and 6 m adhesive gasket (4.5 x 8 mm). For 1600 wide enclosures please order 2 sets.

Part No.
BG01

DRA, Document pocket



Description: Self adhesive, for DIN A4.

Usable depth: 30 mm

Material: Thermoplastic

Colour: Grey, RAL 7035.

Pack. quantity: 1 Document pocket with double sided tape

Part No.
DRA04

DSW, Door switch



Description: Activates any electrical device (lighting, coolers, etc.). Can be fitted after installing the enclosure thereby keeping the door opening free. Fixed (without screws) on the inside hole pattern of the enclosure frame. Cable entry M 20.

Switch capacity: 6A-230V

Approvals: UL, CSA

Pack. quantity: 1 piece with mounting material.

Part No.
DSW01

Use door switch lead DSWC for easy connection.

DRB, Drawing pocket



Description: A large steel document pocket fixed directly onto the door frame. Usable depth: 68 mm.

Material: 1.5 mm steel plate.

Finish: Structure powder paint, RAL 7035.

Pack. quantity: 1 piece with mounting material.

Part No.
DRB0303R5

ECFA, Earthing cable



Description: For earthing and potential compensation between parts and units.

Material: 6 mm² copper wire (yellow-green).

Pack. quantity: 10 pieces

Length	Size	Part No.
220	M8xM6	ECFA220
300	M8xM8	ECFA300

DDK, Drawing desk



Description: Mounted directly to the doorframe it provides a solid surface for documents, computer or measuring devices. The desk can be easily folded and locked within the doorframe space. An automatic safety positioning system locks the desk at angles of 55, 70 and 90 degrees. The DDK 800 can also be mounted on a 1000 mm wide door, by the use of the DCP 1000 accessory.

Material: 1.5 mm steel plate.

Finish: Structure powder paint, RAL 7035.

Pack. quantity: 1 piece with mounting material.

W	Part No.
600	DDK600R5
800	DDK800R5

CSS/CDS, KSS/KDS accessories

DSB, Door accessory kit



Description: Contains standard hinges, frame rod catchers and fixing material.

Pack. quantity: 1 door kit.

Description	Part No.
Single door enclosure kit	DSB01
Double door enclosure kit	DSB02

SGJS, Door hinges 180°




Description: Enables the door to be opened 180°, even when enclosures are linked.

Material: 2.5 mm 304 S 15 stainless steel.

Pack. quantity: 3 pieces

Part No.
SGJS180

DNN, Mounting angles (19")



Description: To achieve 19", or partial 19" in 800 mm, wide enclosures, these profiles can be mounted with the mounting brackets DNB or DNC. To achieve 19" in 600 mm, wide enclosures, use the brackets DND.

Material: 2 mm zinc plated steel.

Pack. quantity: 2 pieces

H	N° of units	Part No.
	6	DNN06
	9	DNN09
	10	DNN10
	11	DNN11
	13	DNN13
	15	DNN15
	18	DNN18
	21	DNN21
	27	DNN27
	33	DNN33
1800	38	DNN38
2000	42	DNN42

DNB, Mounting angles (19") brackets




Description: For mounting 19" profiles in 800mm enclosures

Material: 3 mm zinc plated steel.

Pack. quantity: 4 brackets with mounting material.

Part No.
DNB01

DNC, Mounting angles (19") partial height fixing bracke




Description: For fixing 482.6 mm, partial height mounting brackets (19") in 800 mm, wide enclosures. Adjustable in depth by using click-in profiles SSP.

Material: 3 mm zinc plated steel.

Pack. quantity: 4 brackets with mounting material.

Part No.
DNC01

DND, Mounting angles (19") fixing brackets



Description: For fixing 482.6 mm, mounting brackets (19") in 600 mm, wide enclosures. Adjustable in depth in 12.5 mm, steps.

Material: 3 mm zinc plated steel plate.

Pack. quantity: 4 brackets with mounting material.

Part No.
DND01



CSS/CDS, KSS/KDS accessories

CTR, Castors



Description: For ease of movement of enclosures. Mounted to the frame by brackets.

Delivery: With mounting material.

Maximum load: 240 Kg

Note: Raises the enclosure by 70 mm.

Pack. quantity: 4 pieces

Part No.

CTR70

LF, Levelling feet




Description: Adjustable feet for levelling enclosures placed on uneven ground. Mounted directly to the frame. Maximum load: 300 Kg per foot. Adjustment stroke = 30 mm.

Pack. quantity: 4 pieces

Part No.

LF430

FDA, System actuator

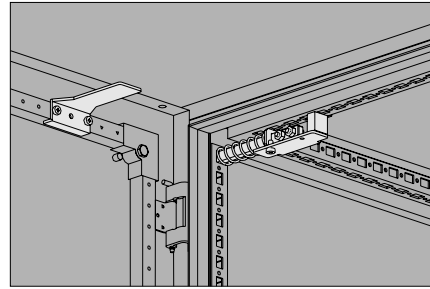

Description: Used with suited multiple enclosure installations. Activates the locking of the slave doors when the master door is closed. One per multiple enclosure system.


Material: Zinc plated steel.

Part No.

FDA01

Available on request.

FDS, Slave door interlock kit

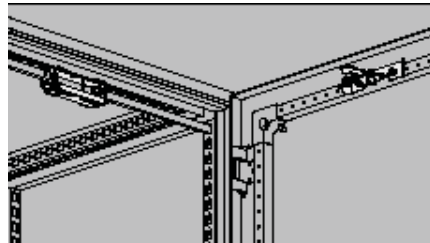

Description: Mounts to slave door and interlock rod to lock slave door when master door is closed. One per slave enclosure.


Material: Zinc plated steel.

Part No.

FDS01

Available on request.

FDR, Interlock rods

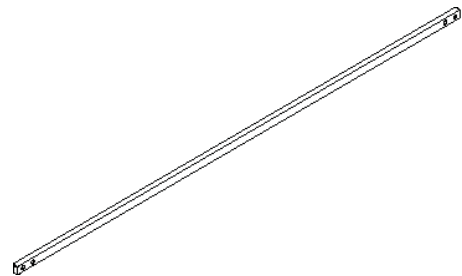

Description: Interlock rods mechanically link all slave doors to the master door. Rod size corresponds to enclosure door width.

Material: Zinc plated steel.

Pack. quantity: 10 pieces

W	Part No.
600	FDR600
800	FDR800
1000	FDR1000
1200	FDR1200

Available on request.



CSS/CDS, KSS/KDS accessories

LS, Front plates



Description: Front plate, (SLSI insert required).

Description	Part No.
Front plate only (add SLSI insert) <i>* for inserts see SLSI.</i>	LSC400

LS, Handles



Description: T-Handle
Pack. quantity: 1 piece

Description	Part No.
T-Handle with Ronis cylinder, key no. C21323 <i>* Other key numbers available on request.</i>	LS360

LS, Swing handles



Description: Swing handles
Pack. quantity: 1 piece

Description	Part No.
Swing handle only, (add LSSI insert). <i>Other key numbers available.</i>	LSC401
<i>*LSC401 requires LSSI type insert.</i>	

LSK, Keys



Description: Key with Eldon logo. Easy to use design and provides a good grip.
Material: Die cast alloy.
Pack. quantity: 1 piece

Description	Part No.
DIN 3 mm	LSK503
DIN 5 mm	LSK505
Square 7 mm	LSK523
Square 8 mm	LSK524
Triangle 7 mm	LSK526
Triangle 8 mm	LSK527



CSS/CDS, KSS/KDS accessories

SLSI, Inserts



Description: Inserts without cover. To be used in combination with cover LSC400

Material: Aluminium alloy

Pack. quantity: 1 piece with mounting material.

Description	Part No.
DIN 3mm	SLSI403
DIN 5mm	SLSI405
Square 7mm	SLSI423
Square 8mm	SLSI424
Triangular 7mm	SLSI426
Triangular 8mm	SLSI427
Daimler Benz	SLSI430

LSSI, Profile half cylinder locks



Description: Profile half cylinder inserts. To be used in the swinghandles LSC401 / LSC501. Also fits the doors for the EIRack range with swing handle: EDPA, EDGA, EDVA and all outlaying doors.

Pack. quantity: 1 piece

Description	Part No.
Profile half cylinder Ronis key C2123	LSSI521
Ronde cylinder Ronis key C21323	LSSI522
Square 7mm	LSSI523
Square 8mm	LSSI524
Triangle 7mm	LSSI526
Triangle 8mm	LSSI527
DIN 3mm	LSSI528
DIN 5mm	LSSI529
Daimler Benz	LSSI530
Push button with round cylinder, key N°C2233.	LSSI532
Cylinder N°E1 (VW), key excluded.	LSSI533
Adapter for other profile half cylinders (DIN18252)	LSSI534
Adapter for Abloy ASSA and Trivoving cylinders	LSSI535
Push button only	LSSI536
CNOMO	LSSI572
Profile half cylinder Ronis key 2132E	LSSI5212132E
Profile half cylinder Ronis key 3121E	LSSI5213121E

* Other key numbers available on request.

** Key numbers 333, 1333, EK333 and GX130 are equal